


FRIALEN SA-TL COLLIER ÉLECTROSOUDABLE TOP-LOADING



pression de service admissible : 16 bar (eau) / 10 bar (gaz).
Pour tubes SDR 11 à SDR 17,6.
Dérivation à souder sur d1, perçage sur d2.

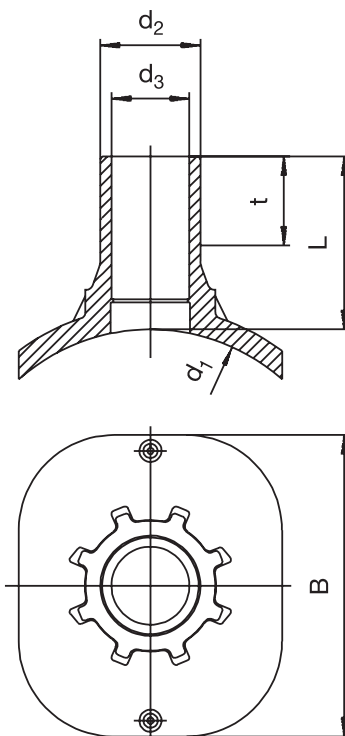

d1	d2	Code	d3	L	t	B	Drilling Ø	Poids
mm	mm		mm	mm	mm	mm	mm	kg
250-560	32	T-615 465	21	109	42	200	20	0,621
250-560	63	T-615 466	47	109	56	200	46	0,676
250-560	90	T-615 850	61	111	80	200	60	0,770

INSTRUCTIONS DE MONTAGE DISPONIBLES SUR NOTRE SITE



d < 250 mm

www.aliaxis.fr



d > 250 mm

