


FRIALEN UB PN 25 MANCHON ÉLECTROSOUDABLE SANS BUTÉE PN 25



pression de service admissible : 25 bar (eau).
Pour tubes SDR 7,4 à SDR 11.

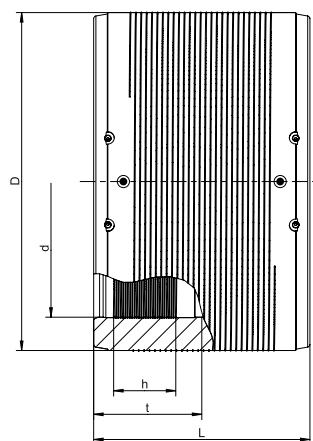


d	Code	D	L	t	h	B	Poids
mm		mm	mm	mm	mm	mm	kg
90	61627020	117	138	69	38	128	0,530
110	61627120	142	159	79	50	152	0,890
125	61627220	160	172	86	45	170	1,200
140	61627320	181	184	92	51	188	1,620
160	61627420	206	203	95	59	213	2,360
180	61628220	225	210	105	63	225	2,950
200	61628320	250	224	110	67	250	3,870
225	61628420	280	240	118	73	280	5,160
250	61628520	315	246	123	68	315	6,840
280	61628620	355	268	134	84	355	10,700
315	61628720	400	285	142	80	400	13,400
355	61628820	450	300	150	88	450	17,900

INSTRUCTIONS DE MONTAGE DISPONIBLES SUR NOTRE SITE



d < 250 mm

www.aliaxis.fr



d > 250 mm

