



# FRIALEN USTR RACCORD DE TRANSITION PE ÉLECTROSOUDABLE / ACIER À SOUDER

pression de service admissible : 16 bar (eau) / 10 bar (gaz).  
Pour tubes SDR 11 à SDR 17,6.

d/DN 25/20-75/65

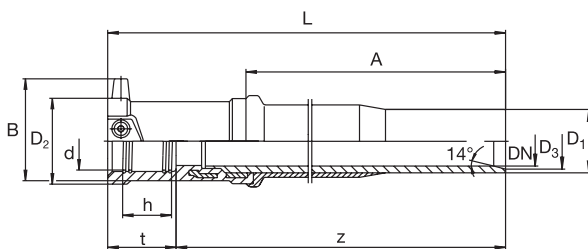

d/DN 90/80-225/200

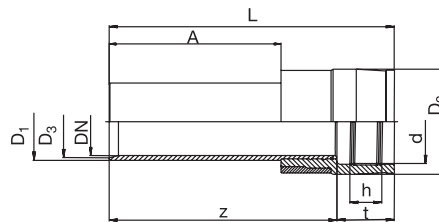

Chanfrein :

- suivant DIN 2442 pour les tubes type A (épaisseur suivant DIN 2441).
- suivant DIN 2470 pour les tubes type B.


d/DN	Code	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	L	A	t	z	h	B	Poids
mm		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
25/20	61274420	26,9	40	20,8	376	300	36,5	339	19,5	-	0,835
32/25	61278020	33,7	47	28,0	388	300	42,0	346	23,5	61,0	1,185
40/32	61278120	42,4	58	36,5	396	300	45,5	351	30,0	69,5	1,604
50/40	61278220	48,3	70	42,5	409	300	53,0	356	29,8	80,0	2,100
63/50	61278320	60,3	84	54,5	410	300	53,0	357	35,0	93,5	2,720
75/65	61278920	76,1	98	70,2	425	300	61,0	364	37,5	-	4,200
90/80	61278420	88,9	143	82,5	397	250	71,5	326	42,8	-	5,225
110/100	61278520	114,3	158	107,0	420	250	83,0	337	47,0	-	8,380
125/100	61278620	114,3	197	107,0	425	250	84,5	341	51,0	-	8,800
160/150	61278720	168,3	227	161,0	484	250	119,5	365	88,7	-	16,830
180/150	61503020	168,0	267	161,0	500	250	115,0	385	67,4	-	21,250
200/200	61279520	219,1	282	211,0	481	225	116,0	365	70,7	-	27,020
225/200	61237020	219,1	300	211,0	459	225	120,0	339	70,2	-	27,350

INSTRUCTIONS DE MONTAGE DISPONIBLES SUR NOTRE SITE



d < 250 mm

[www.alixis.fr](http://www.alixis.fr)



d > 250 mm

